



60 Series Premium Pocket Testers

pH, ORP, Conductivity/TDS/Salinity, Temp.



Durable design:
IP67 Waterproof
& Dustproof



Easy-to-install
Replaceable Probes



Powered by AAA batteries,
up to 2000 hours of
operation time

Display Features




Measurement
Mode



Calibration
Mode



Heads-Up
Mode

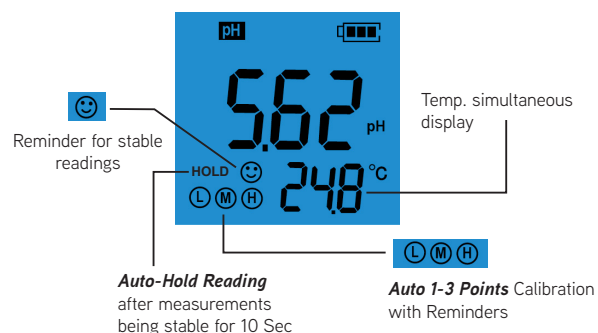

Probe Features

6 Models for your
choice



PH60
(Glass Bulb)

General water solution
pH Test



PH60F
(Flat Glass)

Surface and
micro-volume pH
Test



PH60S
(Spear Glass)

Solid/Semi-Solid
pH Test



ORP60
(Platinum)

ORP Test



EC60
(Platinum Black)

Conductivity/TDS/
Salinity Test



PC60
(Glass Bulb &
Platinum Black)

pH/Cond./TDS/
Salinity Test

Applications



Test anywhere



Micro-Volume
pH Test



Skin pH Test



Food pH Test



		PH60	PH60F	PH60S
pH	Measuring Range	-2.00 to 16.00 pH		
	Resolution/Accuracy	0.01pH / ±0.01 pH		
	Calibration	1 to 3 points Auto Calibration		
ORP	Measuring Range	±1000 mV		
	Resolution/Accuracy	1 mV / ±0.2% F.S		
Temp.	Measuring Range	0 to 50.0 °C (32 to 122°F)		
	Temp. Compensation	Automatic 0 to 50.0 °C (32 to 122°F)		
Others	Heads-Up Function	Yes		
	Self-Diagnosis	Yes		
	Low-Battery Warning	Yes		
	IP Rating	IP67 Waterproof and Dustproof, Floatable		
	Power Supply	DC3V AAA batteries x4; Continuous working > 2000 hours		
	Sensor Model	PH60-E	PH60F-E	PH60S-E
	Application	General water solution's pH	Flat surface pH (fabrics, skin, paper) and micro-volume water solution's pH	Solid/Semi-Solid food samples (cheese, meat, fruit, sushi rice...) and soil's pH
	Compatible Probes	PH60-E, PH60F-E, PH60S-E, ORP60-E		

